



WWW.ARCHSP.COM

Flashing Kit

SPECIFICATIONS:

ARCHITECTURAL SPECIALTIES, INC. (ASI)
 Flashing Kits are manufactured in Milwaukie, Oregon.

MATERIAL TYPE & FINISH - Check One:


- ALUMINUM – .060 aluminum, mill finish.
- STANDARD STEEL Bronze– 26 ga. electro galvanized steel, Bronze exterior.
- STANDARD STEEL White– 26 ga. electro galvanized steel, White exterior

CURB HEIGHT:

- 2x6 Curb Height (Standard): 5" Flashing height. Curb by others.
- 2x4 Curb Height (optional): 3" height. Curb by others.
- Custom Height (optional – fill in below)

SPECIFICATIONS:

- ① **Head Saddle:** Single section with 90 degree bends, 10" flange, seams sealed.
- ② **Sill Saddle:** Single section with 90 degree bends, 10" flange, seams sealed.
- ③ **Step Flashing:** 4" X curb height steps bent at a 90 degree Bend. For on slope condition. Over lap pieces.

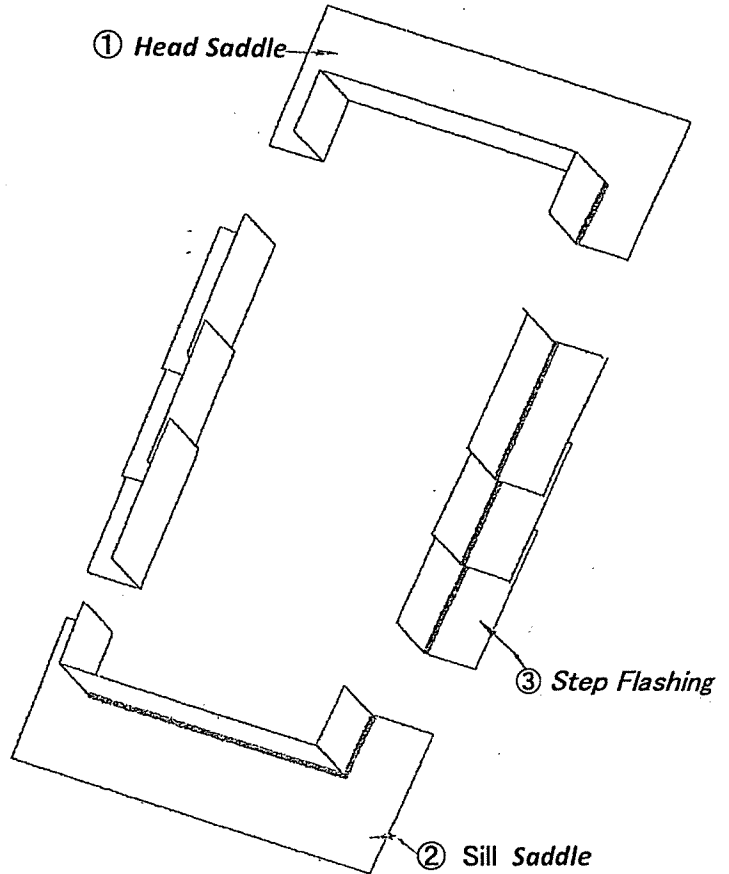

CHECK HERE FOR OPTIONS (call for price):

Custom Finish Fill in: _____

Cricket/Water Diverter: For head saddle and only available in aluminum. Fill in cricket/water diverter detail sheet. Check fill in box below.

FILL IN:			
Quantity	Outside Curb Dimension Width X On Slope (finish)	Custom CURB HT. (Actual flashing will be 1/2" smaller in height)	Cricket - Water Diverter (Y - N)

Contractor:	Project Name:
Architect:	Project Address:
Date:	City/State:



CCB #59161